


## Serial CS6000B Solid State Series "SLIDE" Control Systems

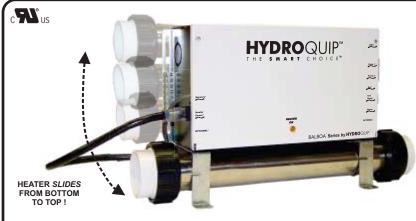

"SLIDE" HEATER FEATURE!

## STANDARD FEATURES

M7<sup>®</sup> Technology Equipped "*SLIDE*" 1.325/5.5KW, 15" Heater Assembly Spaside Control All Circuits Convertible to 120 or 240VAC 12V Light Assembly Freeze Protection Standard, Economy & Sleep Modes Lighted Smart Cords Easy To Install & Service Installation Kit (see below) Detailed Owners Manual & Wiring Diagram US and Canada UL Recognized

## OPTIONS

Versi-Heat Remote Heater with 60" Cords Various Heater Wattages Wireless Remote Control Less Heater Unit

Spaside Control	Model	Platform	Pump 1	Pump 2	Blower	Circ Pump	Heater
HT-701S Series 7.4"L x 3.2"H	CS6229B-USZ CS6239B-USZ CS6339B-USZ	VS511SZ VS510SZ VS520SZ	2 SPD 2 SPD 2 SPD 2 SPD	2 SPD 1 SPD 2 SPD	N/A 1 SPD (12A) 1 SPD (12A)	YES YES YES	5.5kW 5.5kW 5.5kW
SPASIDE OPTIONS INSTALLATION KIT (Included)   Kit Includes: Kit Includes:   Remote Control Spaside Control (See Above)						6	
I/R Receiver Sensor (7') Wirele H	ess I/R Remote Kit IQ PT#: 48-0197 available separately)	Auxiliary Spaside HQ PT#: 34-0228-U 7.5"L x 2.3"H	Compo 2" Tail	le Adapter Pla onent Cords pieces w/Gasl ght Assembly	kets		Ø

**Balboa® Series** 

Model	Circuit Board	Spaside	M7 <sup>∞</sup> Sensors (46")	Heater Element (5.5kW)	Heater Assy (15")
CS6229B-USZ	33-0033A	34-0227-U	34-0202B (x2)	12-0100-K	22-87M-S00-1F03
CS6239B-USZ	33-0033	34-0227-U	34-0202B (x2)	12-0100-K	22-87M-S00-1F03
CS6339B-USZ	33-0033B	34-0227-U	34-0202B (x2)	12-0100-K	22-87M-S00-1F03

SYSTEM SPECIFICATIONS						
ELECTRICAL INPUT SPECIFICATION:	SINGLE PHASE,120/240VAC, 60HZ	FLOW RATE:	23 GPM Min.			
ELECTRICAL OUTPUT SPECIFICATIO CIRCUIT(S)	N: MAXIMUM AMPS	SYSTEM DIMENSIONS:	15"W x 11"H x 6"D			
PUMP(S) BLOWER	12A 12A	SHIPPING WEIGHT:	18 LBS			
OZONE CIRCULATION PUMP 12V LIGHT HEATER	1A 4A 1A 23A	PACKAGING / SHIPPING :	INDIVIDUAL (HQ STOCK) FOB CORONA, CA 92880			