


FLOAT ASSEMBLY MUST BE INSTALLED HAND TIGHTENED NO MORE THAN 1/4 TURN

Auto Fill Unit must be installed flush with the deck. To Adjust for water level, loosen adjusting screw indicated above and move float up or down, then tighten screw.

MP Industries, Inc. recommends that you use an approved ABS-PVC glue. Follow the instructions for the cure time on the can of glue. Always test the water line for leaks.

MP Industries, Inc. recommends you install the Water Level Control with an approved Anti-Siphon Valve or Double Check Valve.

FOR SWIMMING POOL & SPA

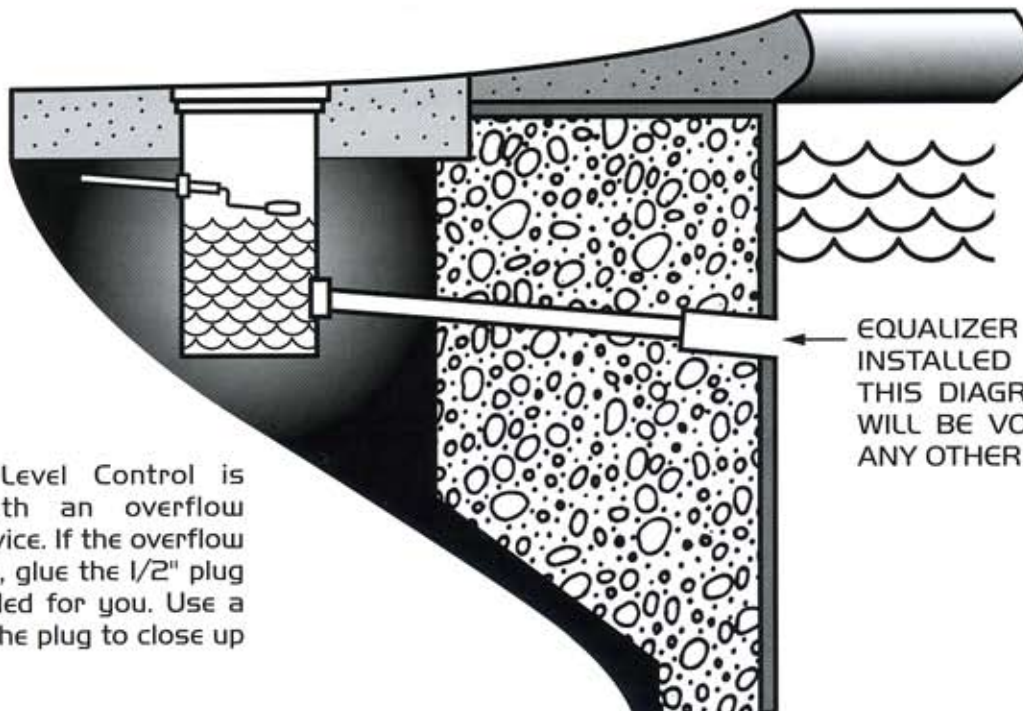

EQUALIZER LINE MUST BE INSTALLED AS SHOWN IN THIS DIAGRAM. WARRANTY WILL BE VOID IF INSTALLED ANY OTHER WAY!

The Water Level Control is equipped with an overflow protection device. If the overflow is not desired, glue the 1/2" plug that is provided for you. Use a PVC glue on the plug to close up the overflow.